

(51) International Patent Classification 6 : G11B 33/04		A1	(11) International Publication Number: WO 95/19035
			(43) International Publication Date: 13 July 1995 (13.07.95)
(21) International Application Number: PCT/DK95/00014		(81) Designated States: AM, AT, AT (Utility model), AU, BE, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, SK (Utility model), TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).	
(22) International Filing Date: 10 January 1995 (10.01.95)			
(30) Priority Data: 0039/94 10 January 1994 (10.01.94) DK			
(71)(72) Applicant and Inventor: NIELSEN, Frank [DK/DK]; Vinkelvej 2, DK-4000 Roskilde (DK).			
(74) Agent: CHAS. HUDE; H.C. Andersens Boulevard 33, DK-1553 Copenhagen V (DK).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

A storage system for compact disks comprises a holder and a loose rail (2) which is secured to the edge of a compact disk cassette (3). The rail (2) is provided on the top side or at the end with a moulding which together with the moulding of the holder form a fixed and pivotal, respectively, connection. One or several engaging means (5) are according to the invention provided on the bottom side of the rail (2), said engaging means fitting in mating openings (7) in the edge of the compact disk cassette (3). In this manner the existing openings (7) in the compact disk cassette (3) are utilized and accordingly said compact disk cassette need not be particularly formed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Title: A storage system for compact disks

Technical Field

The invention relates to a storage system for compact disks, said storage system comprising a holder and a loose rail which is secured to the edge
5 of the compact disk cassette and which is provided on the top side or at the end with a moulding, said moulding forming a fixed and pivotal, respectively, connection together with the moulding of the holder.

Background Art

US-PS No. 3,452,878 discloses a storage rack for magnetic tape car-
10 tridges. The magnetic tape cartridges are provided with projecting adapter pieces, and the top side of each cartridge is provided with a rail which can engage said adapter pieces. At the top, the rail is provided with a moulding fitting in corresponding grooves in a transverse, superjacent holder to which the rail can be secured.

15 Brief Description of the Invention

The object of the invention is to provide a storage system for compact disks, which is far more simply structured than the previously known systems.

A storage system of the above type is according to the invention
20 characterised in that the bottom side of the rail is provided with one or several engaging means fitting in corresponding openings in the edge of the compact disk cassette. In this manner the already existing openings in the compact disk cassette are utilized, and accordingly the compact disk cassette need not be formed in a special way.

According to a particularly advantageous embodiment of the invention, the engaging means are angular, said means being inserted in the openings in the edge of the cassette and then horizontally displaced.

According to an alternative embodiment of the invention, the engaging means are of a split type with barbs being inserted in the openings in the edge of the cassette. The engaging means may alternatively be composed of separate means inserted in the openings in the edge of the cassette through openings in the rails.

According to a second embodiment of the invention, the rail is provided on each side with one or more grooves insertable in corresponding milled grooves in a holder.

As an alternative, it is possible to use two rails being laterally reversed relative to one another, whereby said rails are provided at one end with a flat round pin and can be mounted on both sides of the cover of the compact disk cassette, said round pins being inserted in a holder/folder back provided in the top and the bottom with milled grooves mating the pins of the rail.

Brief Description of the Drawings

The invention is explained in greater detail below with reference to the accompanying drawings, in which

Figs. 1A, 1B, and 1C illustrate a rail with angular engaging means insertable in the edge of a compact disk cassette,

Figs. 2A and 2B illustrate an alternative embodiment of the engaging means of the rail during the insertion into the edge of a compact disk cassette,

Fig. 3A illustrates a rail provided on both sides with one or more grooves insertable in corresponding milled grooves in a holder,

Fig. 3B illustrates how the rails are mounted in the holder,

Fig. 4A illustrates a rail with two milled grooves in one end and provided with round pins, said milled grooves mating corresponding milled grooves in a wall section,

Fig. 4B is a side, front, and top view of the wall section,

Fig. 4C illustrates how the rails are mounted in the wall section,

Fig. 4C is a perspective view of the mounted cassettes,

10 Fig. 5A illustrates two rails being laterally reversed relative to one another, which can be mounted at both the upper and the lower edge of the cover of the compact disk cassette, each rail being provided at one end with a flat round pin insertable in a holder,

Fig. 5B illustrates how the rails are mounted on each cassette and subsequently inserted in the holder,

Fig. 5C illustrates the mounted cassettes.

Best Mode for Carrying Out the Invention

The storage system shown in Figs. 1A, 1B, and 1C for compact disks 19 comprises a holder 1 and a loose rail 2 which can be secured to the edge of a compact disk cassette 3. On the top side or at the end, the rail 2 is provided with a moulding which forms a fixed and pivotal, respectively, connection together with the moulding of the holder 1. On the bottom

side, the rail 2 is provided with one or several angular engaging means 5 fitting in corresponding openings 7 in the edge of the compact disk cassette 3. These openings 7 result from the casting of the cassette whereby inward webs are formed which serve to retain illustrating material for the compact disk. The rail 2 with the 90° angular engaging means 5 are inserted vertically in the openings in the edge of the compact disk cassette 3 and subsequently horizontally displaced in the openings 7 with the result that the rail 2 is clamped into position.

Each rail 2 is of a width of approximately 10 mm and a height of approximately 5 mm, and it is made of aluminium or plastics.

As an alternative, the engaging means 5 can be of the split type with barbs 5a, cf. Figs. 2A and 2B. Then the rail 2 with the split engaging means 5a is vertically inserted in the openings 7 in the edge of the compact disk cassette 3 and pressed into position. In this manner the compact disk cassette 3 is retained by means of the engaging means 5a.

The engaging means may alternatively be composed of separate or loose means which can be secured to a cassette through openings in the rail.

Figs. 3A and 3B illustrate a rail 2, which is provided on each side with one or more grooves 8 insertable in mating milled grooves 9 in a holder 1. The holder 1 is for instance mounted below a shelf by means of double-faced tape or screws 18. The compact disk cassette 3 is mounted and retained on the rail 2 which can be inserted in and removed from, respectively, the milled grooves 9 of the holder 1. The compact disk cassette 3 can be opened without necessitating a demounting of the rail 2.

Figs. 4A and 4B illustrate a rail 2, which is provided at one end with two milled grooves 10 and two round pins 11. The milled grooves 10 and the round pins 11 fit in corresponding milled grooves 12 in a wall section 13.

The wall section comprises a hollow lower part, at which the section is secured to a wall surface by means of screws 18. The wall section comprises further an upper part provided with the milled grooves 12. Fig. 4B illustrates how the round pins 11 are inserted in the milled grooves 12 and then horizontally displaced so as finally to be turned in a downward direction. As a result, the rail 2 cannot be removed directly. The wall section 13 retains a plurality of rails 2 with compact disk cassettes 3 mounted thereon in the stored position. The desired compact disk cassette 3 is tipped upwards whereby the rail 2 is in its vertical position. In this position, the compact disk cassette 3 can be opened and the compact disk 19 can be removed. The compact disk cassette 3 remains in the vertical position until it is closed and tipped into its storing position.




Figs. 5A, 5B, and 5C illustrate an alternative embodiment where two rails 2 are used, said rails being symmetrical relative to one another. The rails are mounted on both the top and the bottom edge of the cover of the compact disk cassette 3. At the end, the rails 2 are provided with a flat round pin 14. The pins 14 are inserted in a holder in form of a folder back 15, which is provided with a milled groove 16 in the top and the bottom, said milled groove receiving the pins 14. The folder back 15 retains for instance eight compact disk cassettes 3. The desired compact disk cassette 3 can be opened and the compact disk 19 in question can be removed from said cassette 3.

Claims.

1. A storage system for compact disks comprising a holder and a loose rail, which is secured to the edge of a compact disk cassette, said rail being provided on the top side or at the end with a moulding which
5 together with the moulding of the holder form a fixed and pivotal, respectively, connection, characterised in that the bottom side of the rail (2) is provided with one or several engaging means (5) fitting in mating openings (7) in the edge of the compact disk cassette (3).
2. A storage system as claimed in claim 1, characterised in
10 that the engaging means (5) are angular and inserted in the openings (7) on the edge of the compact disk cassette (3) and then horizontally displaced.
3. A storage system as claimed in claim 1, characterised in
15 that the engaging means are of the split type with barbs (5a) being inserted in the openings (7) in the edge of the compact disk cassette (3).
4. A storage system as claimed in the preceding claims 1 to 3, characterised in that the rail (2) is provided on both sides with one or more grooves (8) insertable in mating milled grooves (9) in a holder (1).
5. A storage system as claimed in the preceding claims 1 to 3, characterised in that the rail (2) comprises two milled grooves (10) in
20 one end and is provided with two round pins (11), said milled grooves (10) mating milled grooves in a wall section (13).
6. A storage system as claimed in the preceding claims 1 to 3, characterised in that it comprises two substantially symmetrical rails (2),
25 which at one end are provided with a flat round pin (14) and are mounted on both sides of the cover of the compact disk cassette (3), the flat pins


(14) of said rails being inserted in a holder/folder back (15) which can receive the flat pins (14) of the rails.

1/10

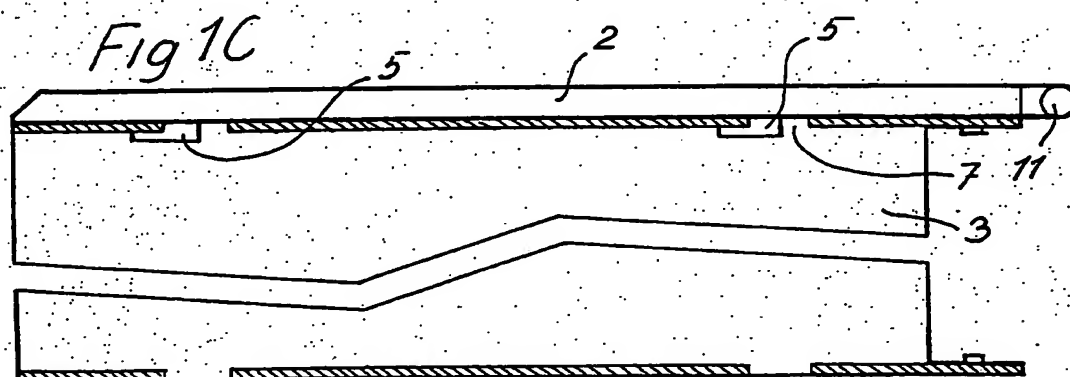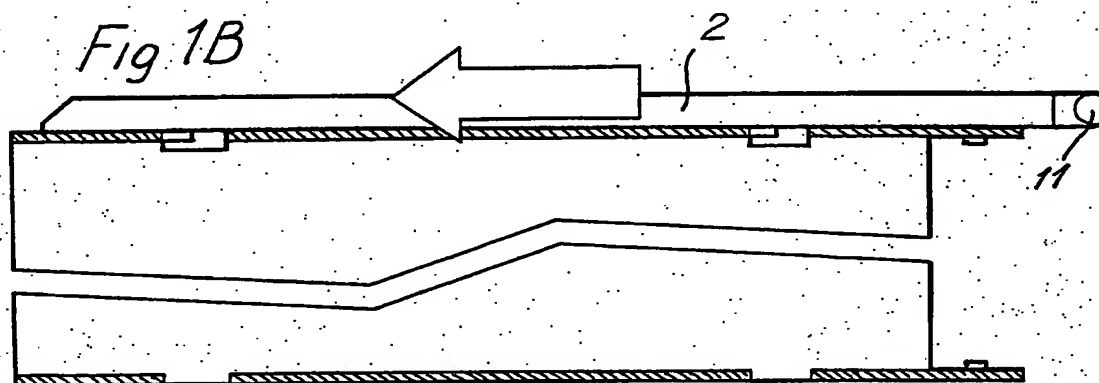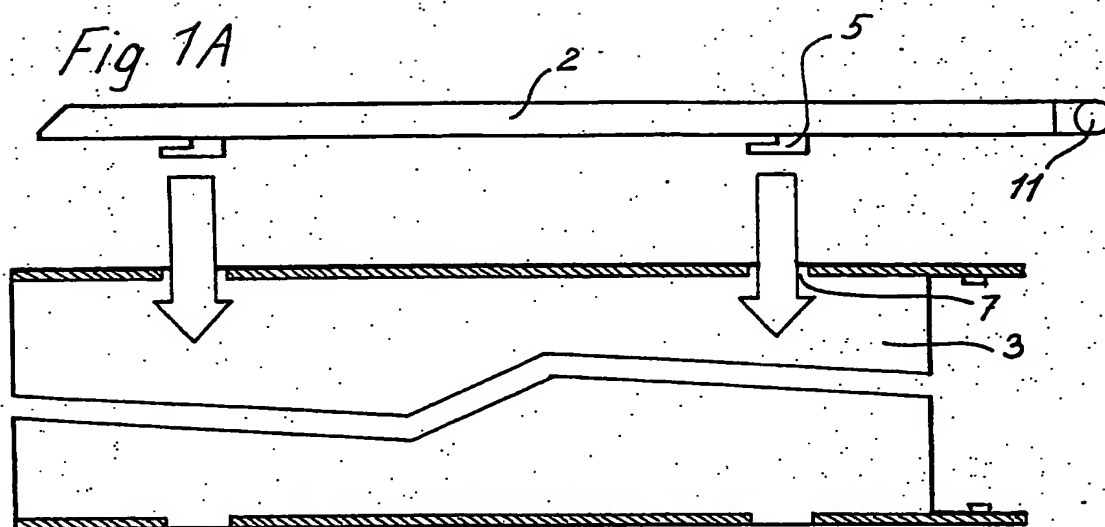

SUBSTITUTE SHEET




2/10

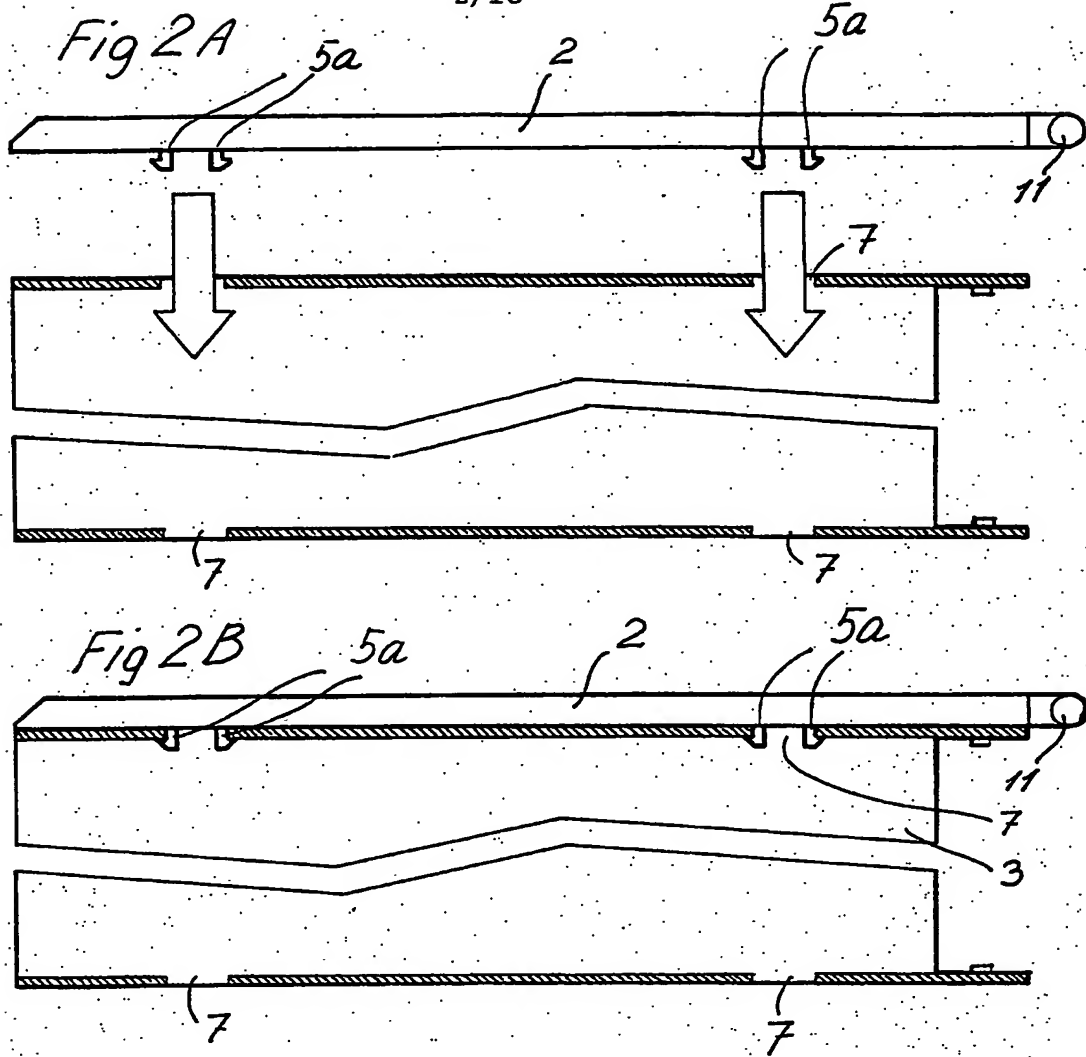

SUBSTITUTE SHEET

3/10


Fig 3A

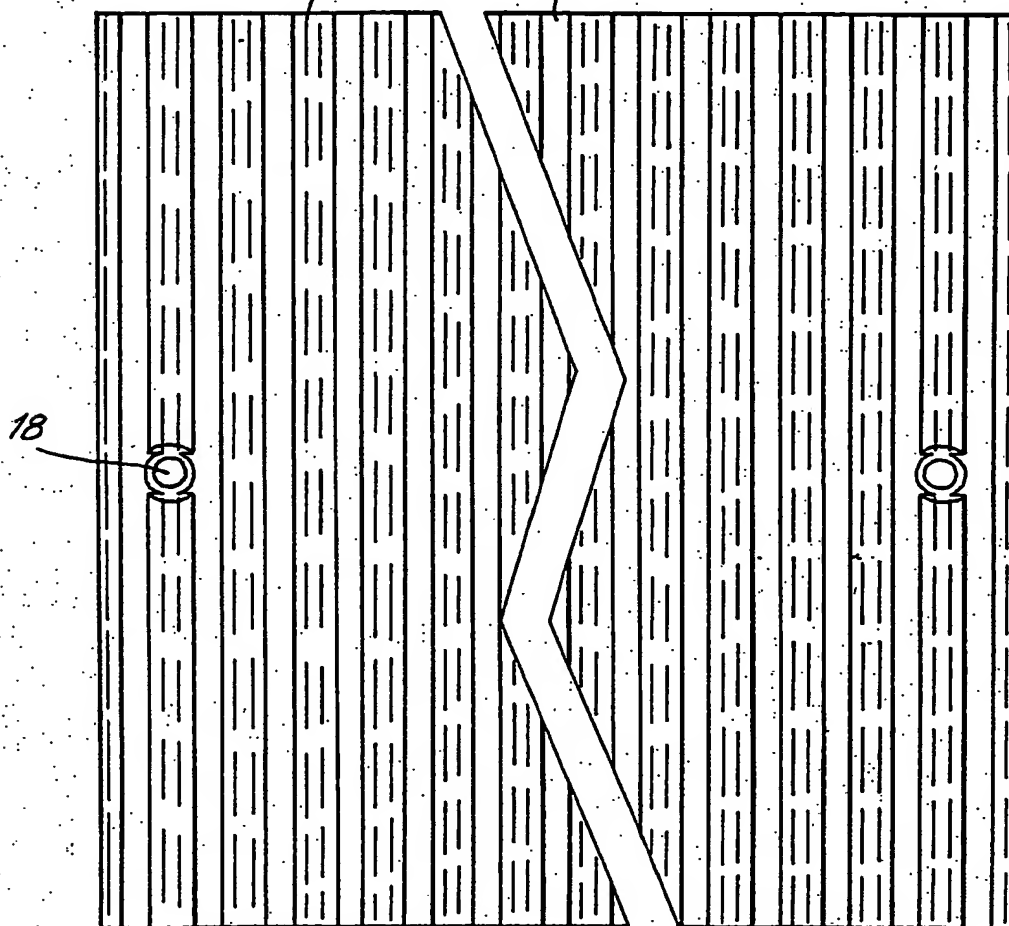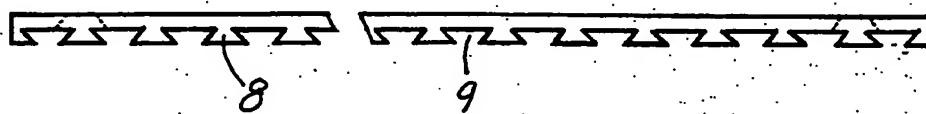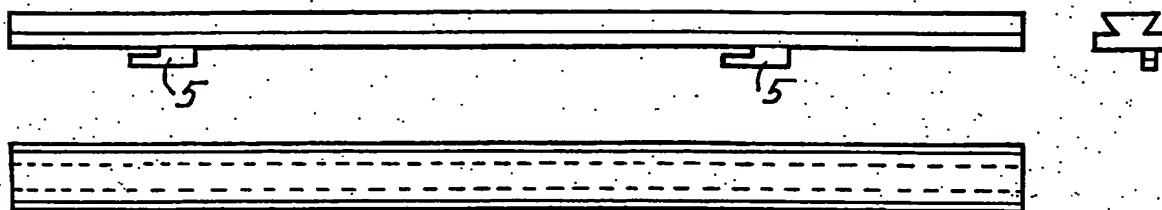

SUBSTITUTE SHEET

4/10

Fig 3B

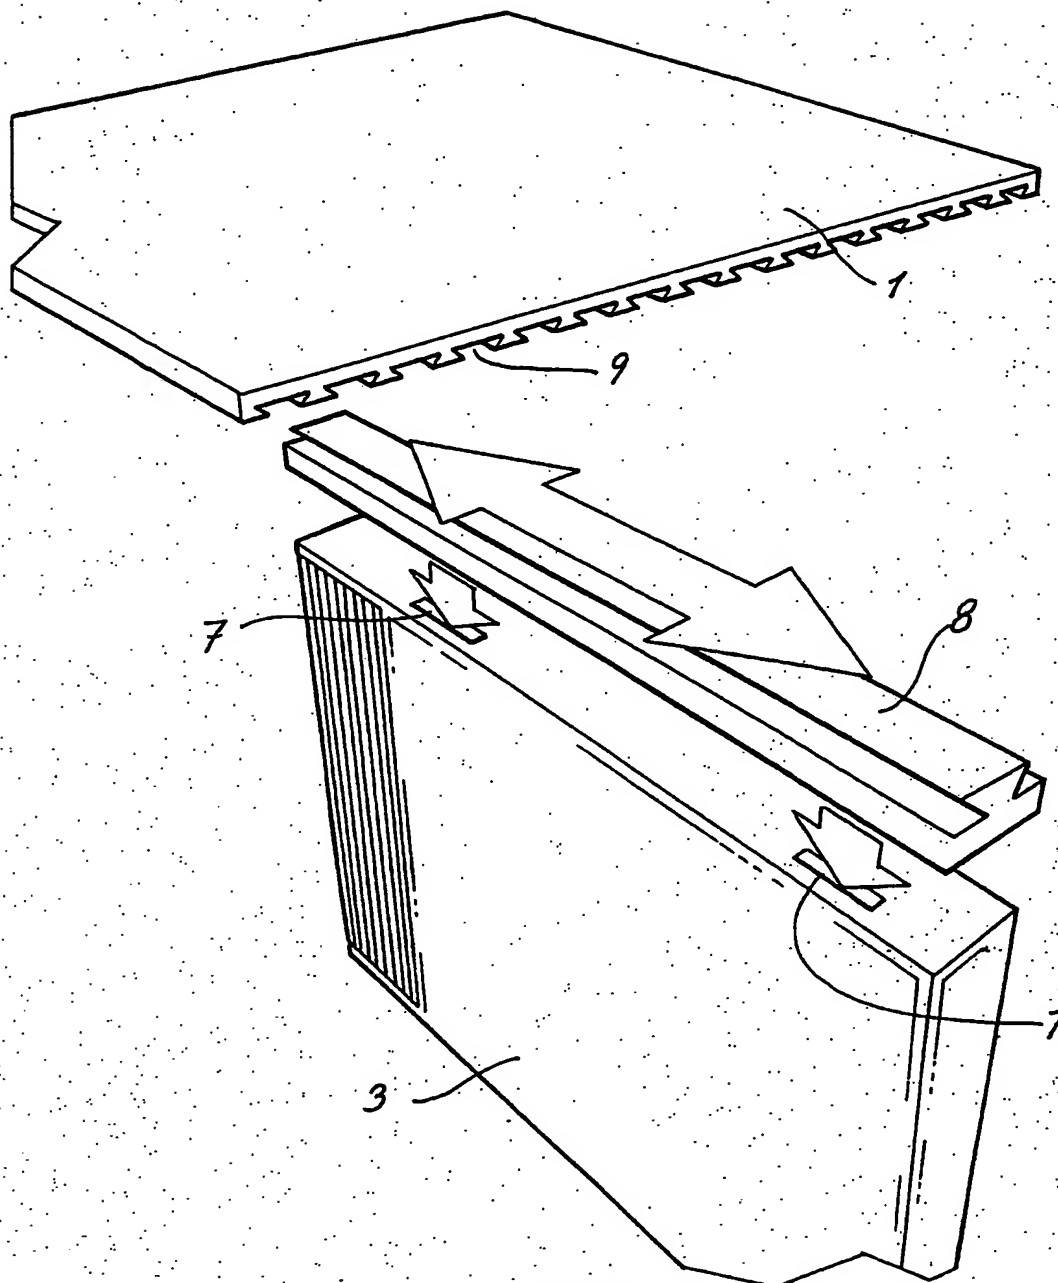

SUBSTITUTE SHEET

5/10

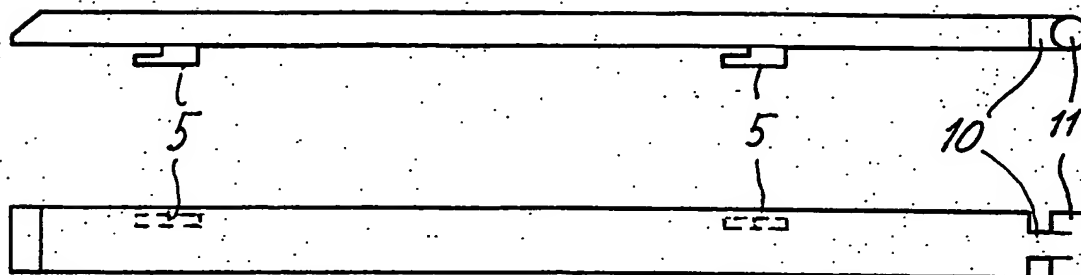


Fig 4A

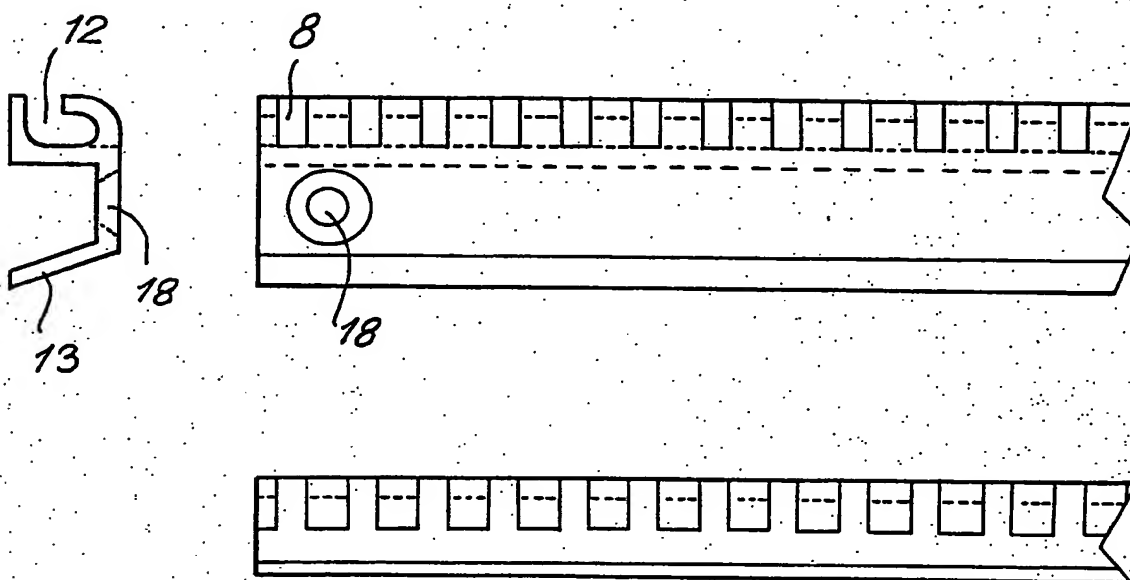


Fig 4B

SUBSTITUTE SHEET

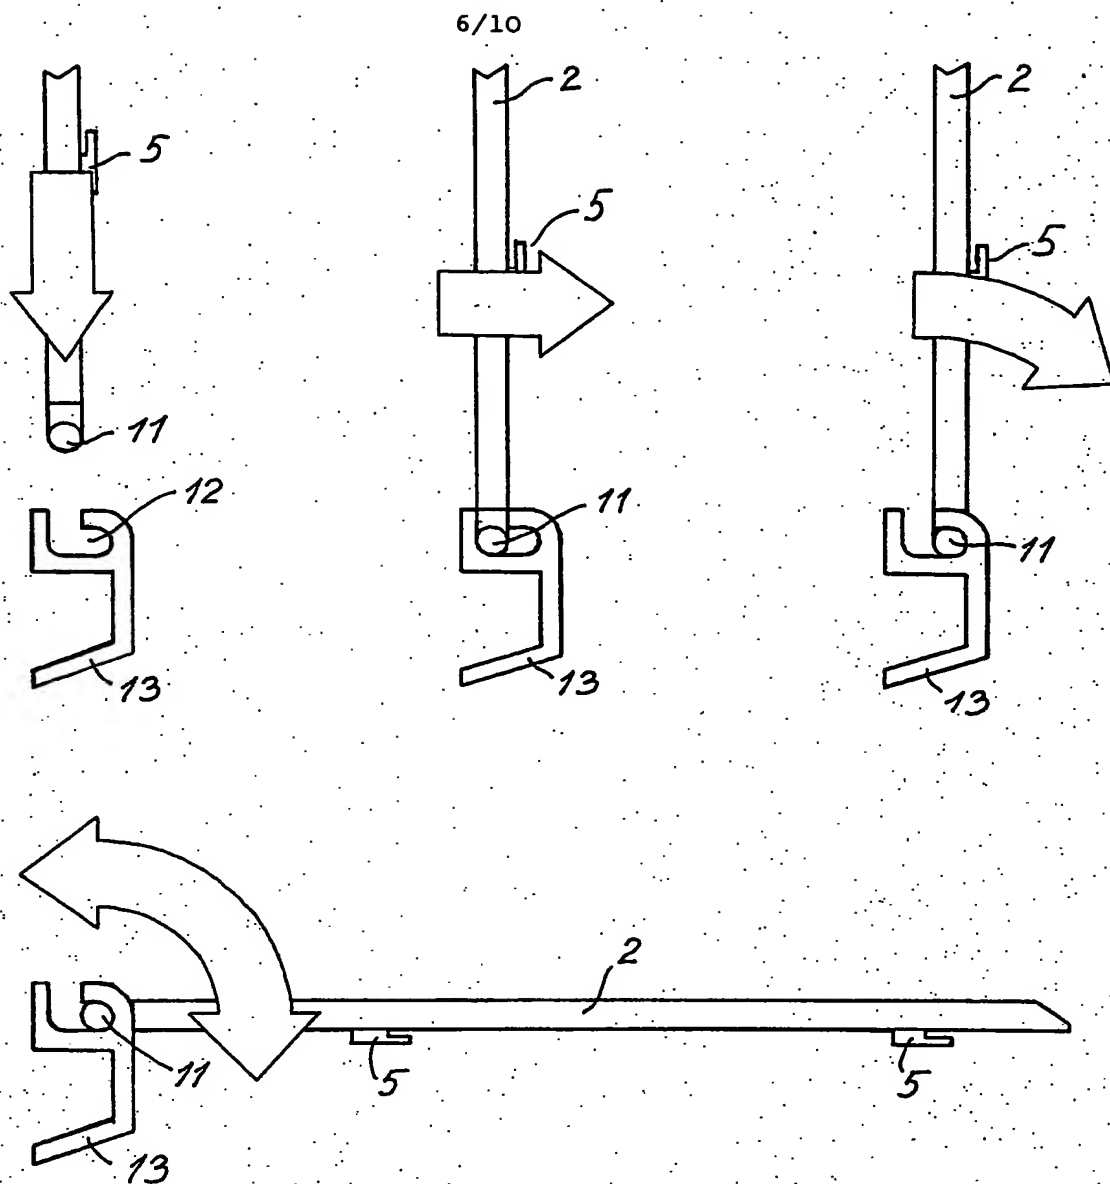


Fig 4C

SUBSTITUTE SHEET

7/10

Fig 4D




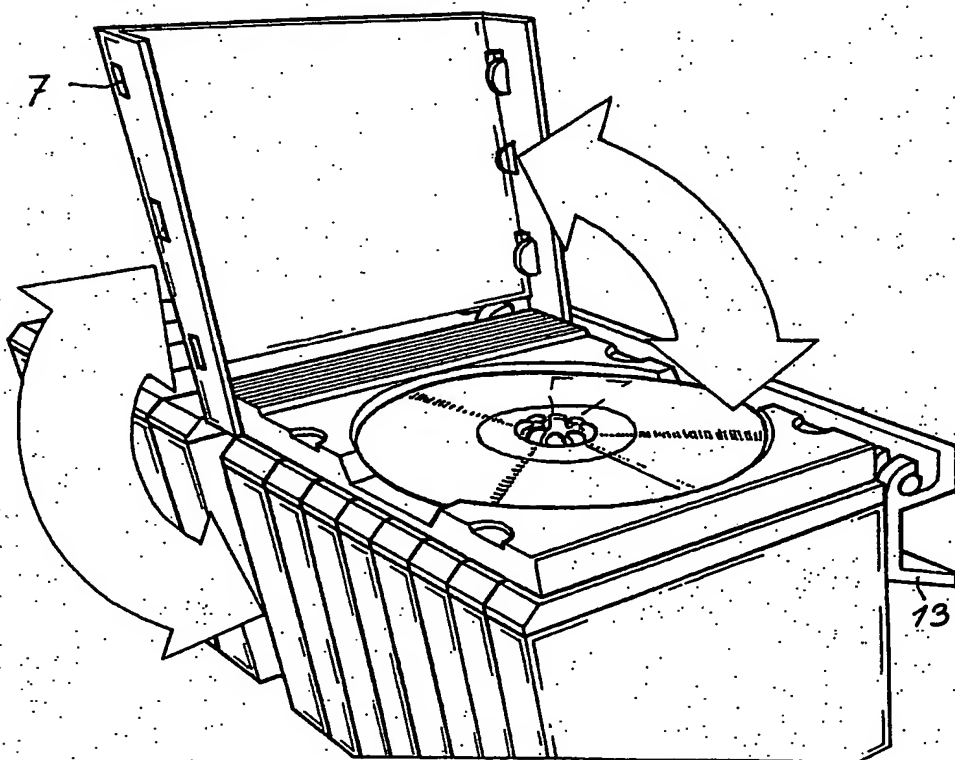
**SUBSTITUTE SHEET**

Fig 5A

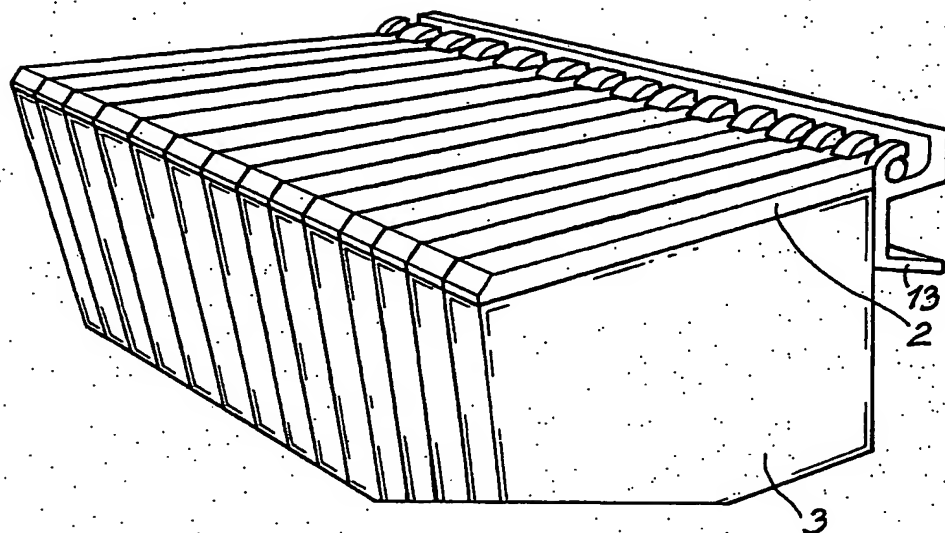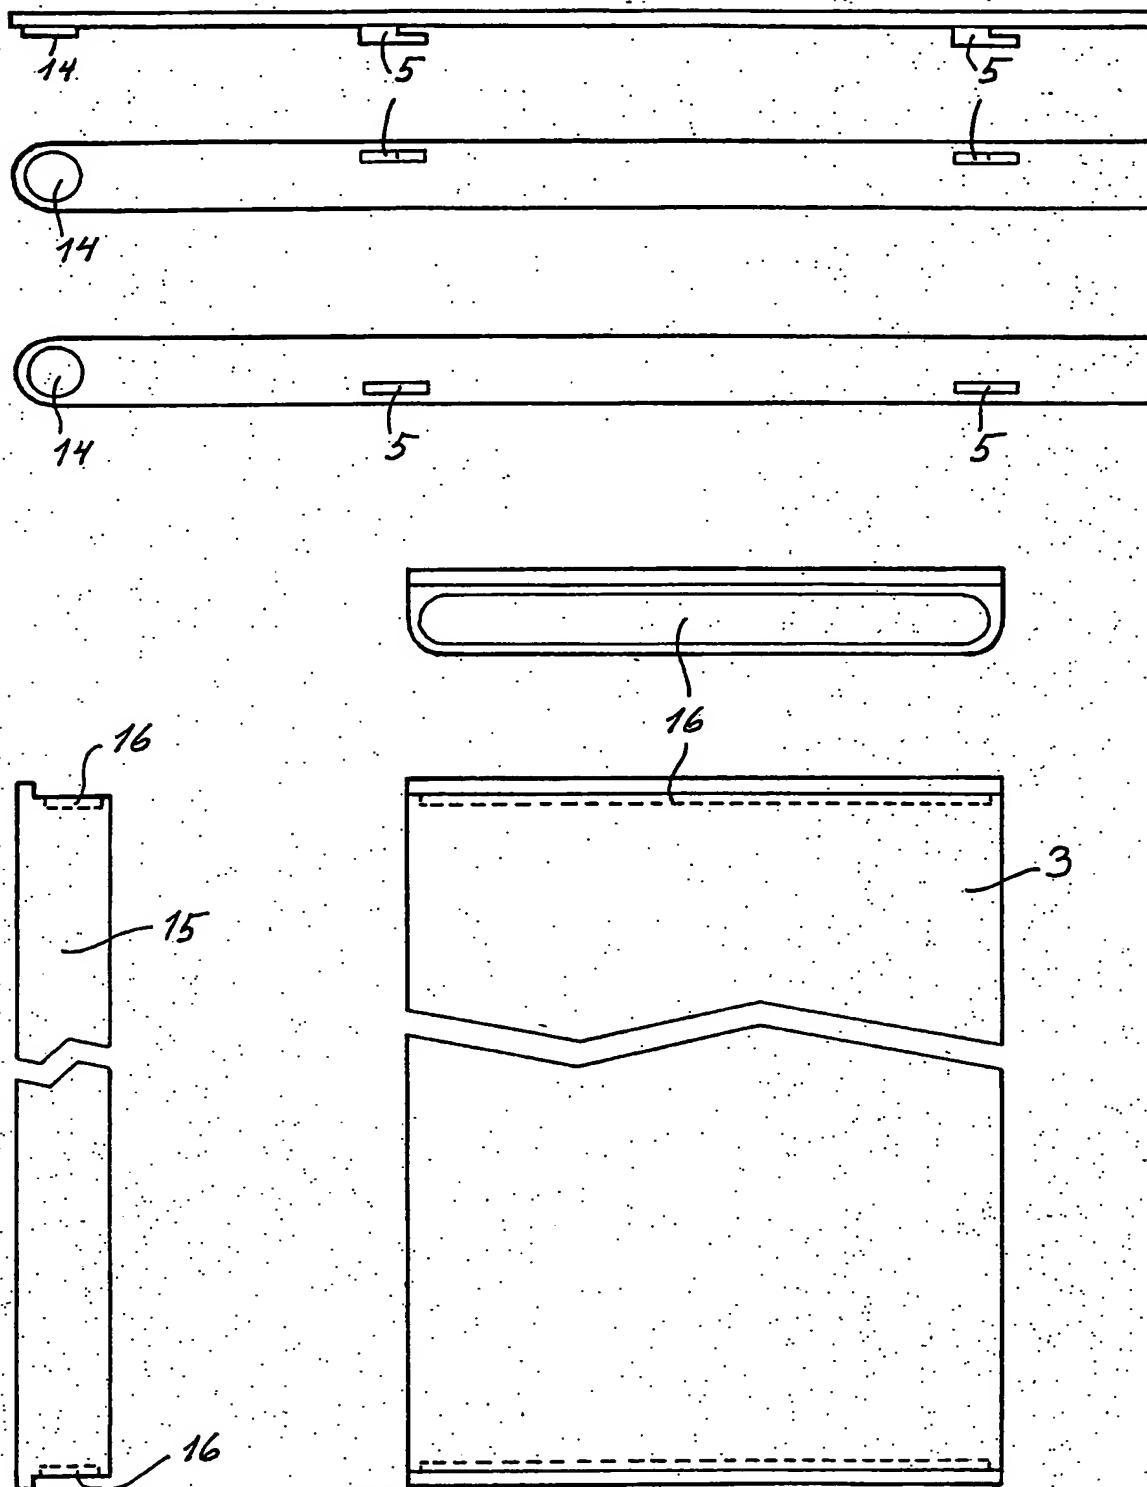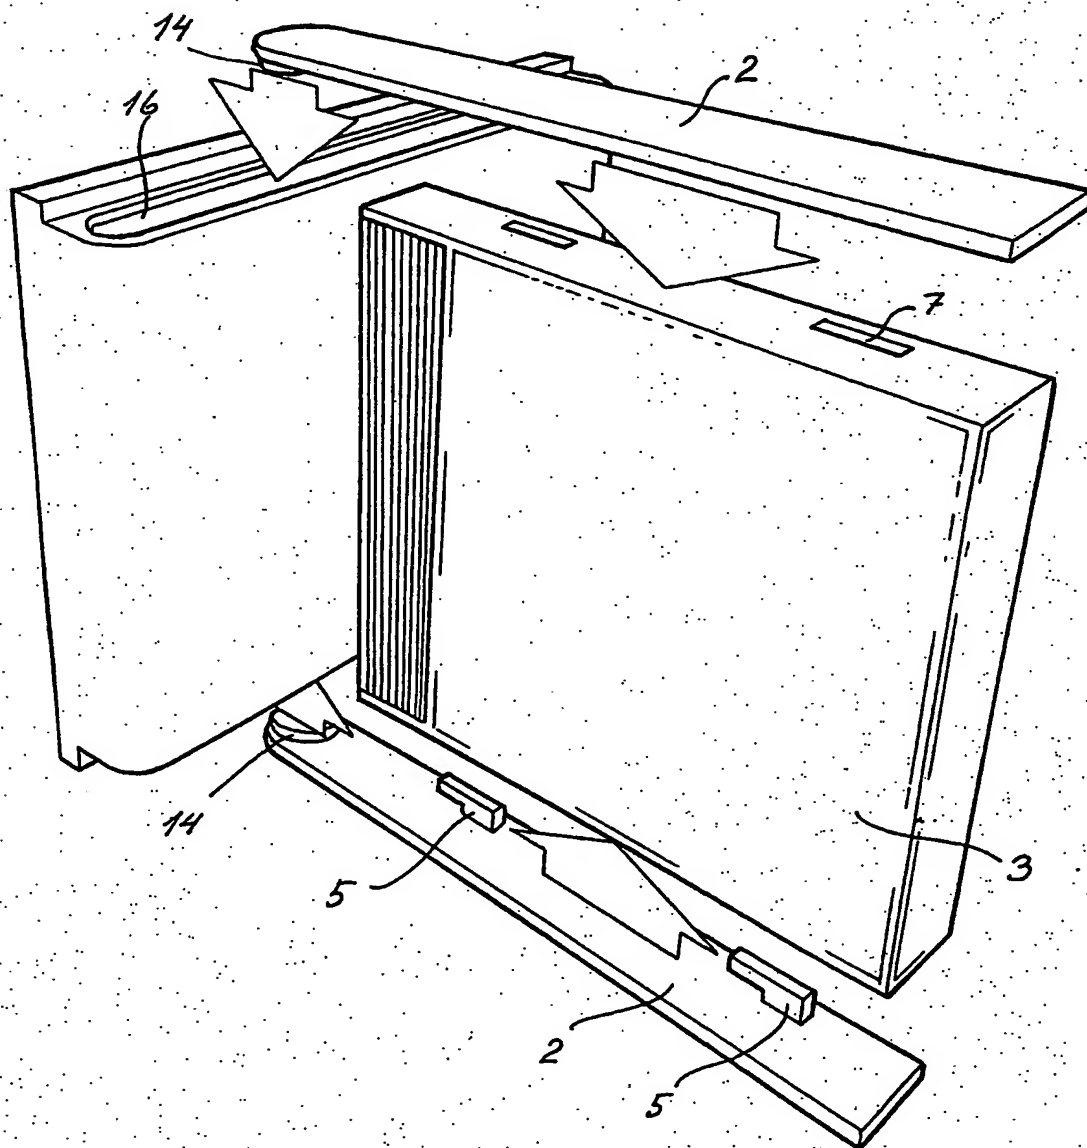

SUBSTITUTE SHEET

9/10

Fig 5B**SUBSTITUTE SHEET**

10/10

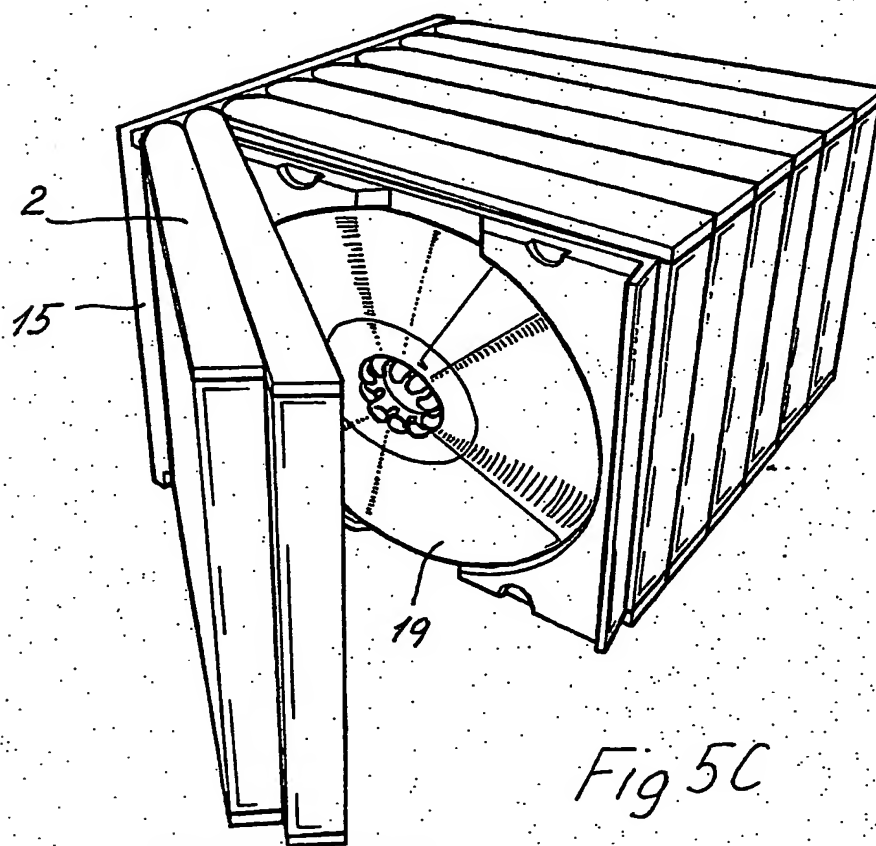
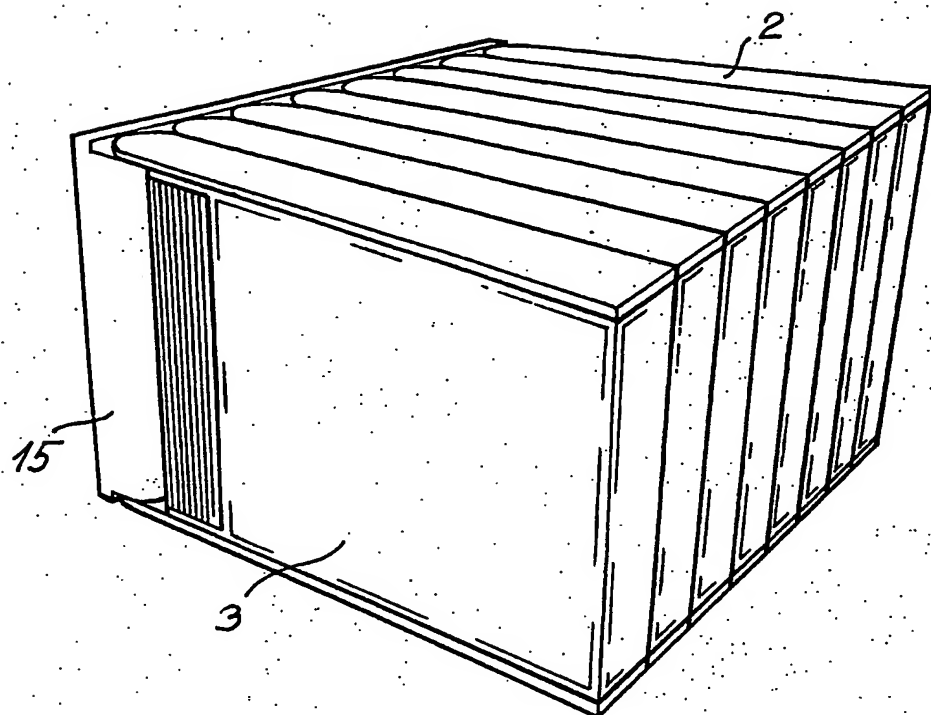


Fig 5C

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International application No.

PCT/95/00014

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G11B 33/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A47B, A47F, B65D, G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO, A1, 9203823 (KAPPERS, J.), 5 March 1992 (05.03.92), figure 1, detail 7, claims 1-2 --	1
Y	US, A, 3452878 (S.R. SMITH), 1 July 1969 (01.07.69), column 2, line 16 - line 43, figure 1 --	1
A	CH, A5, 672035 (SOMERS, S.B.), 13 October 1989 (13.10.89), figures 1,7, detail 2d, abstract --	1-6

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 1995

Date of mailing of the international search report

08 -05- 1995

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Vilho Juvonen
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/D/00014

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT.

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4330161 (A.B. KHAWAND), 18 May 1982 (18.05.82), column 2, line 4 - line 52, figures 1-3 -----	1-6

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/95

International application No.
PCT/DK/92/00014

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO-A1-	9203823	05/03/92	AU-A-	8494891	17/03/92
			NL-A-	9001867	16/03/92
US-A-	3452878	01/07/69	NONE		
CH-A5-	672035	13/10/89	NONE		
US-A-	4330161	18/05/82	NONE		

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.